



HEPA filter


Exhaust air is as clean as that of air cleaner.

HEPA Filter is used as the main filter to capture very fine particles effectively.

Able to capture **99.97%** of particles as small as **0.3-1µm**



Controller

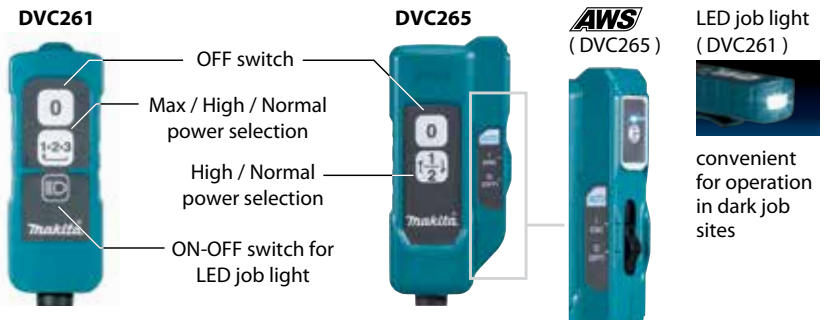

LED job light (DVC261) convenient for operation in dark job sites

AWS Auto-start Wireless System DVC265 only

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



Expanding AWS Line-up



DVC261 18V X2 (36V) LXT BL Brushless Cordless HEPA Backpack Vacuum Cleaner

Cordless Backpack Vacuum Cleaner



- Increased Suction Power for Improved Dust Collection when Connected with Makita Power Tools
- BL motor allows 2.3 m³/min of Max air flow / 11 kPa of Max sealed suction / 105 W of Suction power and long run time to go together
- Mode memory function allows to start in the same suction power when you turned it off previously
- Delivers up to 140 min of run time using BL1860B on normal setting
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform



Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24)

Capacity	Paper Dust Bag: 2.0 L Cloth Dust Bag: 1.5 L
Continuous Use (min.)	w/ BL1860B (Max): 40 w/ BL1860B (High): 75 w/ BL1860B (Normal): 140
Max Air Flow	w/ Hose complete 38-1.5: 2.3 m³/min w/ Hose complete 32-1.0: 2.2 m³/min w/ Hose Complete 28-1.0: 2.0 m³/min w/ Hose Complete 28-1.5: 1.8 m³/min
Max Sealed Suction	11 kPa
Suction Power	Max / High / Normal w/ Hose 38-1.5: 105 / 55 / 30 W Max / High / Normal w/ Hose 32-1.0: 95 / 50 / 25 W Max / High / Normal w/ Hose 28-1.0: 90 / 45 / 25 W Max / High / Normal w/ Hose 28-1.5: 85 / 45 / 25 W
Net weight	3.8 - 4.5 kg (8.5 - 9.9 lbs.)

DVC261Z